


# WIND SENSOR with 4-20mA outputs

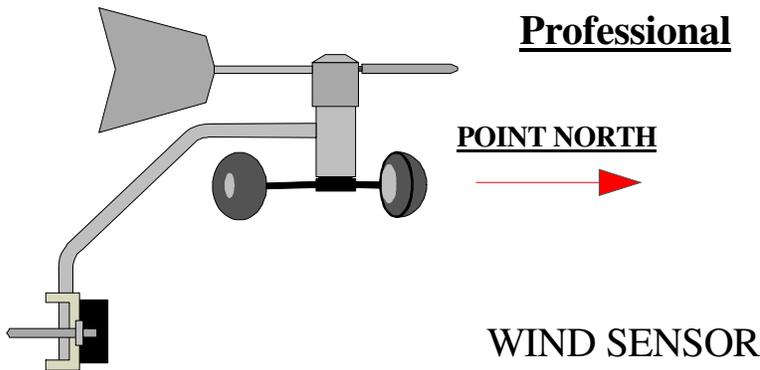

The combined Wind Speed and Direction Sensors are manufactured from anodized aluminium alloy, UPVC and stainless steel with moulded polypropylene cups. The units are lightweight (less than 250 grams) yet very robust.

The sensors are designed to be mounted to a mast of between 30 - 50 mm diameter by means of a V-shaped clamp and bracket. This allows simple orientation to North using the compass provided; the only setting up required.

Wind Direction is sensed by a precision conductive potentiometer which combines exceptionally long life with high sensitivity.

Wind Speed is derived from a Hall Effect solid state magnetic switch activated by magnets in the cup rotor running in precision stainless steel ball race and 'Oilite' bearing giving very high sensitivity and very long life.


## Specification

### WIND SPEED

Typical accuracy 5% or 1.5 m/s  
 Resolution better than 0.5 m/s  
 Threshold <0.5 m/s

### WIND DIRECTION

Accuracy +/- 5 degs. typical (+/- 10 degs. worst case)  
 Resolution Generally < 1 deg. ( +/- 10 degs. at North)  
 Threshold <0.5 m/s

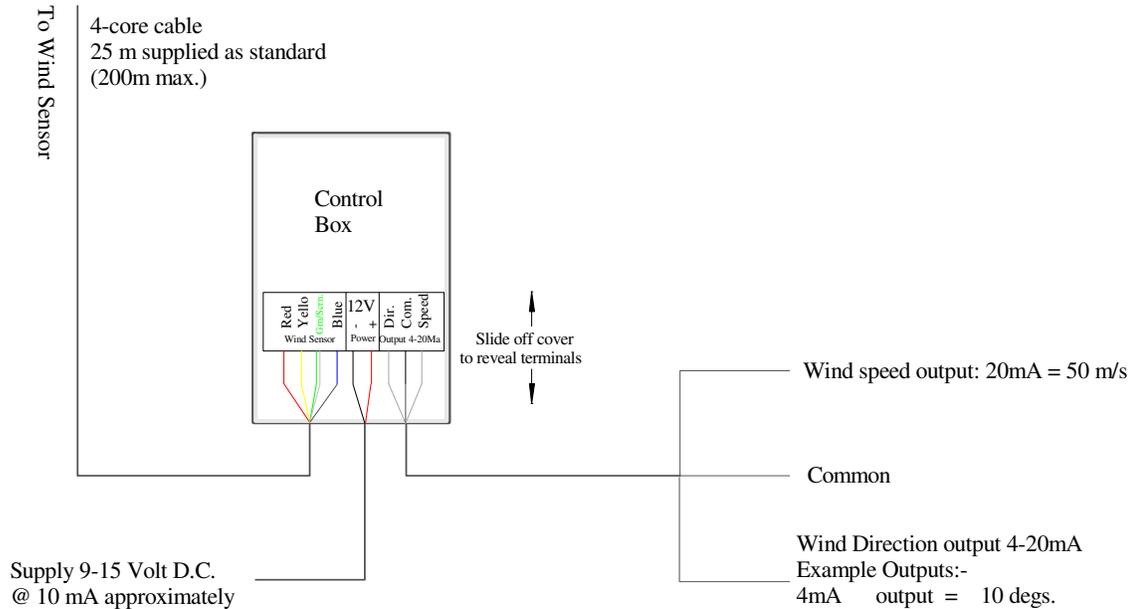

## InstroMeT Ltd. (A Novomec Group company)

Lyngate Industrial Estate North Walsham Norfolk NR28 0AW Tel +44 (01692) 502800 Fax. +44 (01692) 502801 e-mail:sales@novomec-group.co.uk  
 websites: www.instromet.co.uk www.weathermonitoring.co.uk www.weathermonitoring.com

583 0000 109 Rev. 1 07.06.04