

KL

Solar

Photovoltaic

Modules




KL10 / KL12 / KL15

KL Solar provides cost-effective photovoltaic power for general use, operating DC directly or, in an inverter-equipped system, AC loads. The 36 cells in series provides 10W, 12W & 15 Watts of maximum power, it is used primarily in telecommunications, remote villages, clinics, and load-based aids to navigation.

P6

S
E
R
I
E
S

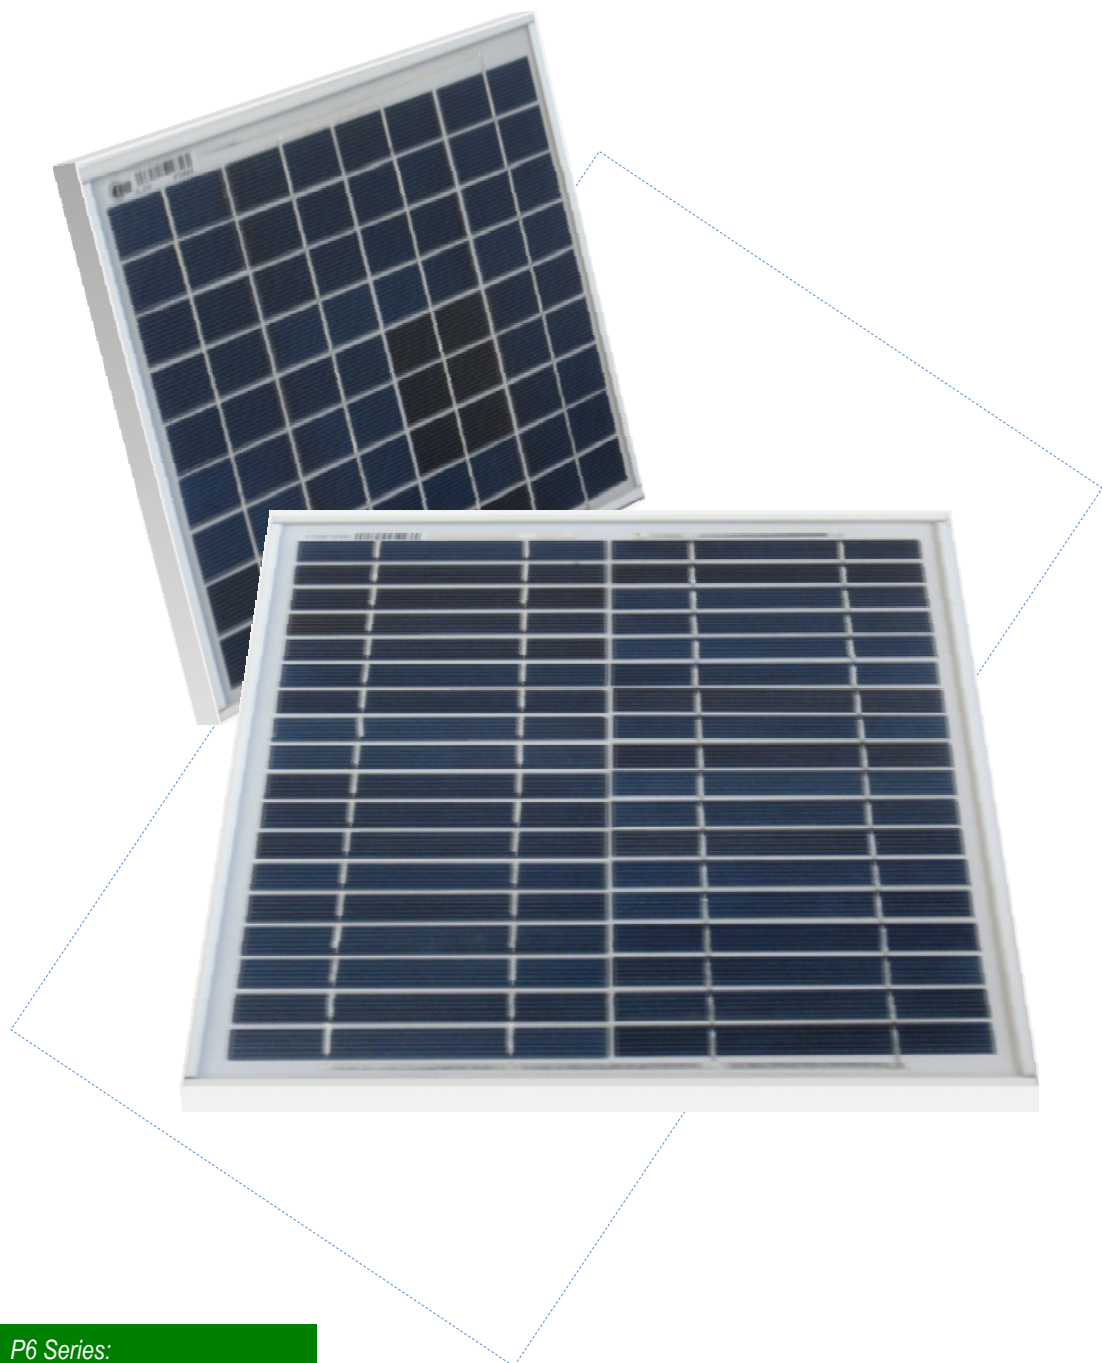

P6 Series:
Polycrystalline Modules

Electrical and Mechanical


Model	KL10	KL12	KL15
Maximum power (Pmax)	10 Wp	12 Wp	15 Wp
Open Circuit Voltage (Voc)	21.5 V	21.5 V	21.5 V
Maximum power point voltage (Vmpp)	17.1 V	17.1 V	17.1 V
Short circuit current (Isc)	0.65 A	0.79 A	0.98 A
Maximum power point current (Impp)	0.59 A	0.70 A	0.88 A
Tolerance	±10%	±10%	±10%
Cell Size (mm)	26 X 78	18 X 156	18 X 156
No. of cells	36	36	36
Dimensions (mm) ± 1	345 x 285 x 22	406 x 346 x 38	406 x 346x 38
Maximum system voltage	600	600	600
Temperature co-efficient	NOCT (°C)45	NOCT (°C)45	NOCT (°C)45
$\frac{\partial}{\partial T} (Voc) (mV/°C)$	- 105	- 105	- 105
$\frac{\partial}{\partial T} (Isc) (mA/°C)$	- 0.32	- 0.32	- 0.32
$\frac{\partial}{\partial T} (Pmax) (%/°C)$	- 0.45	- 0.45	- 0.45
Weight (kgs)	1.2	1.9	1.9

Standard Test Condition : Irradiance 1,000 W/sq.m, Temperature 25deg C Air mass 1.5 spectrum)



Proven Materials and Construction

KL Solar experience shows in every aspect of this module's construction and materials


- Anodized aluminum frame offers required strength and allows for quick and easy installation on standard array structures.
- 36 Crystalline silicon solar cells in series.
- Modules are laminated in toughened low iron content PV grade glass – Ethyl Vinyl Acetate films – PV module back sheet.
- Optimized lamination process parameters ensure a stable laminate. Junction Box with PG Cable glands are standard in 12W & 15W modules.
- Each module is flash tested in a Sun simulator to ensure conformity to specification.

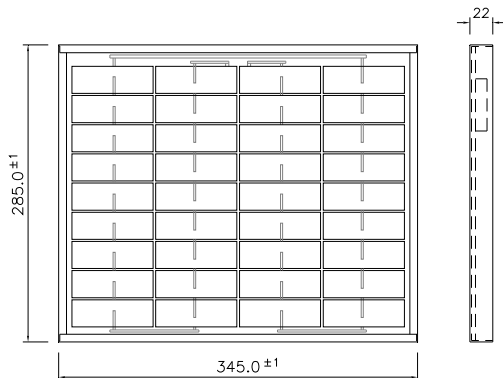

KL10 Module

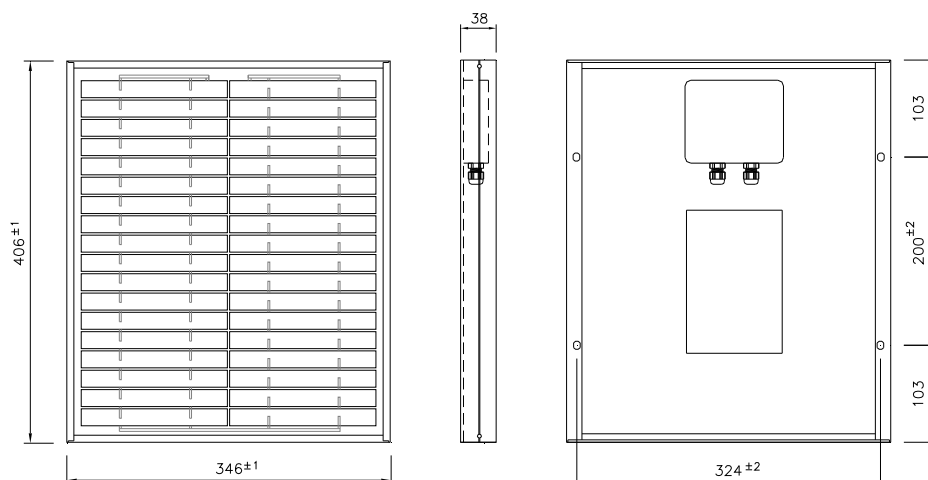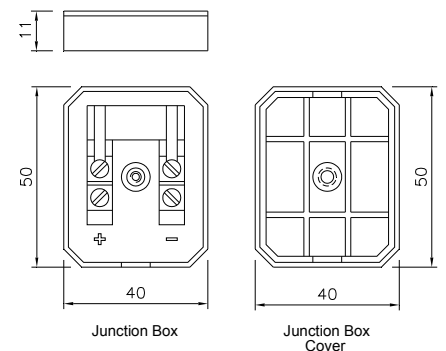

KL12 & KL15 Module

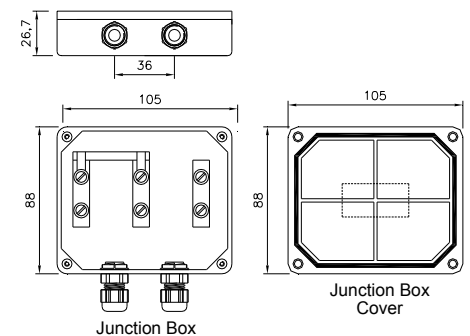

KL SOLAR COMPANY PVT LTD.,

100% Export Oriented Unit,
Coimbatore – 641 014. INDIA.

Phone : +91 422 6563638 / Fax : +91 422 2567562

email : info@klsolar.com / www.klsolar.com